




① SC-155 AND SC-177 DEMO PLAN
1/8"=1'-0"

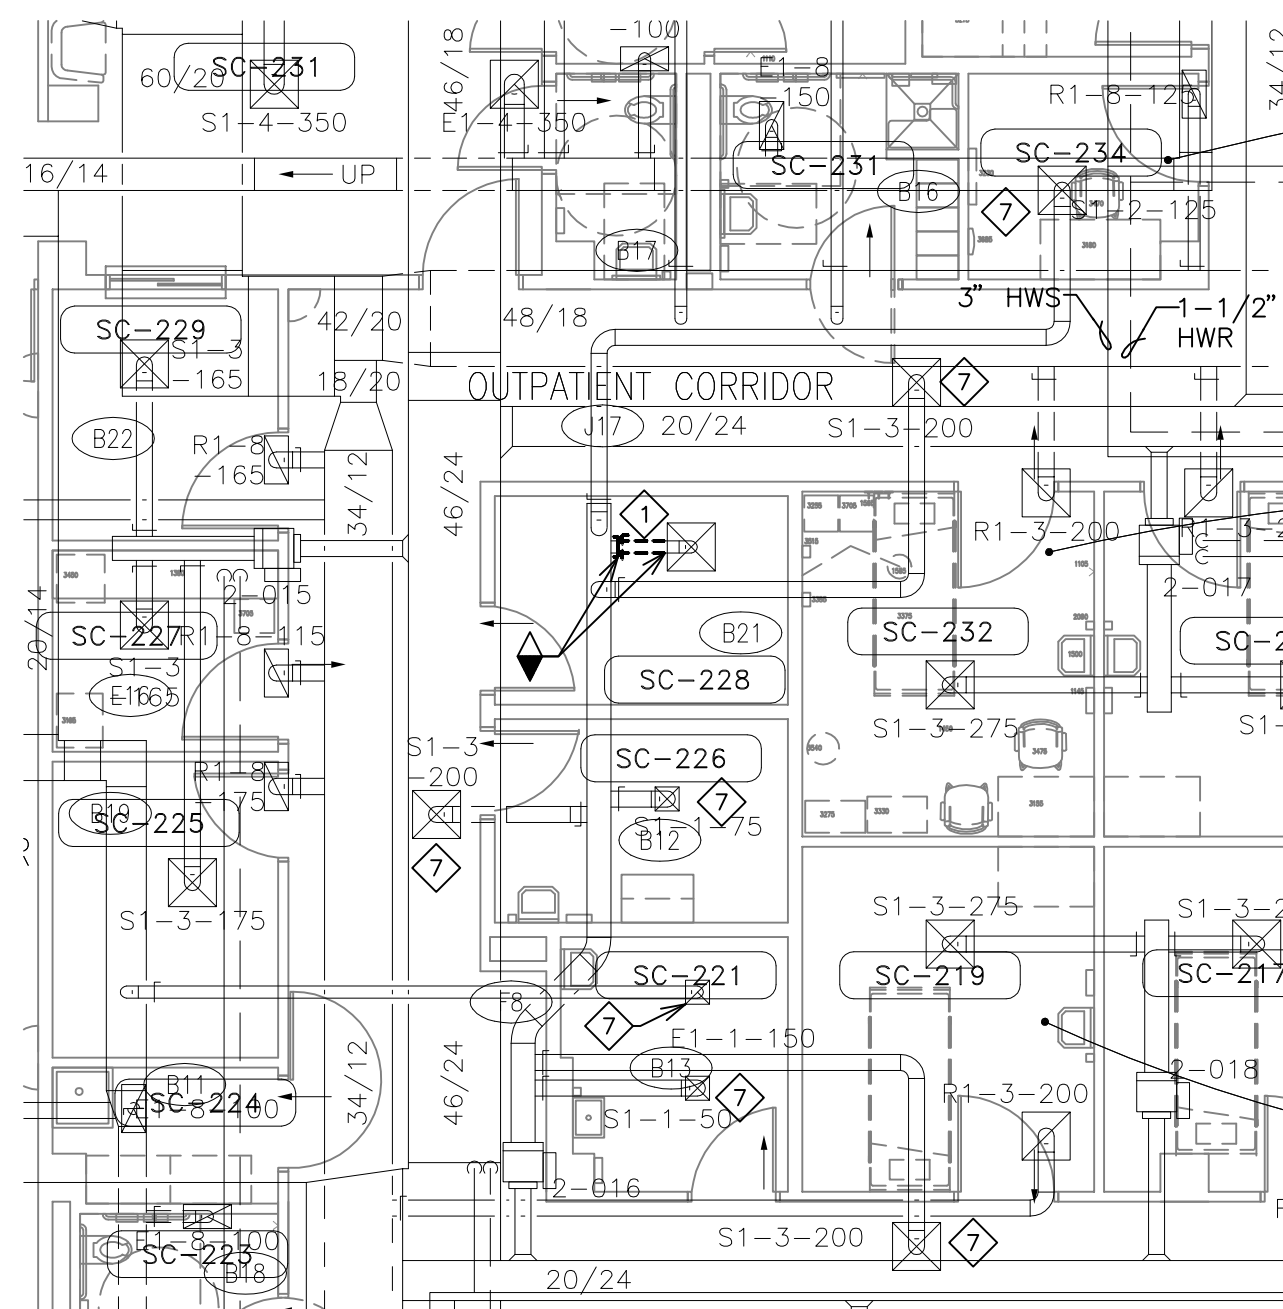


② SC-228 DEMO PLAN
1/8"=1'-0"

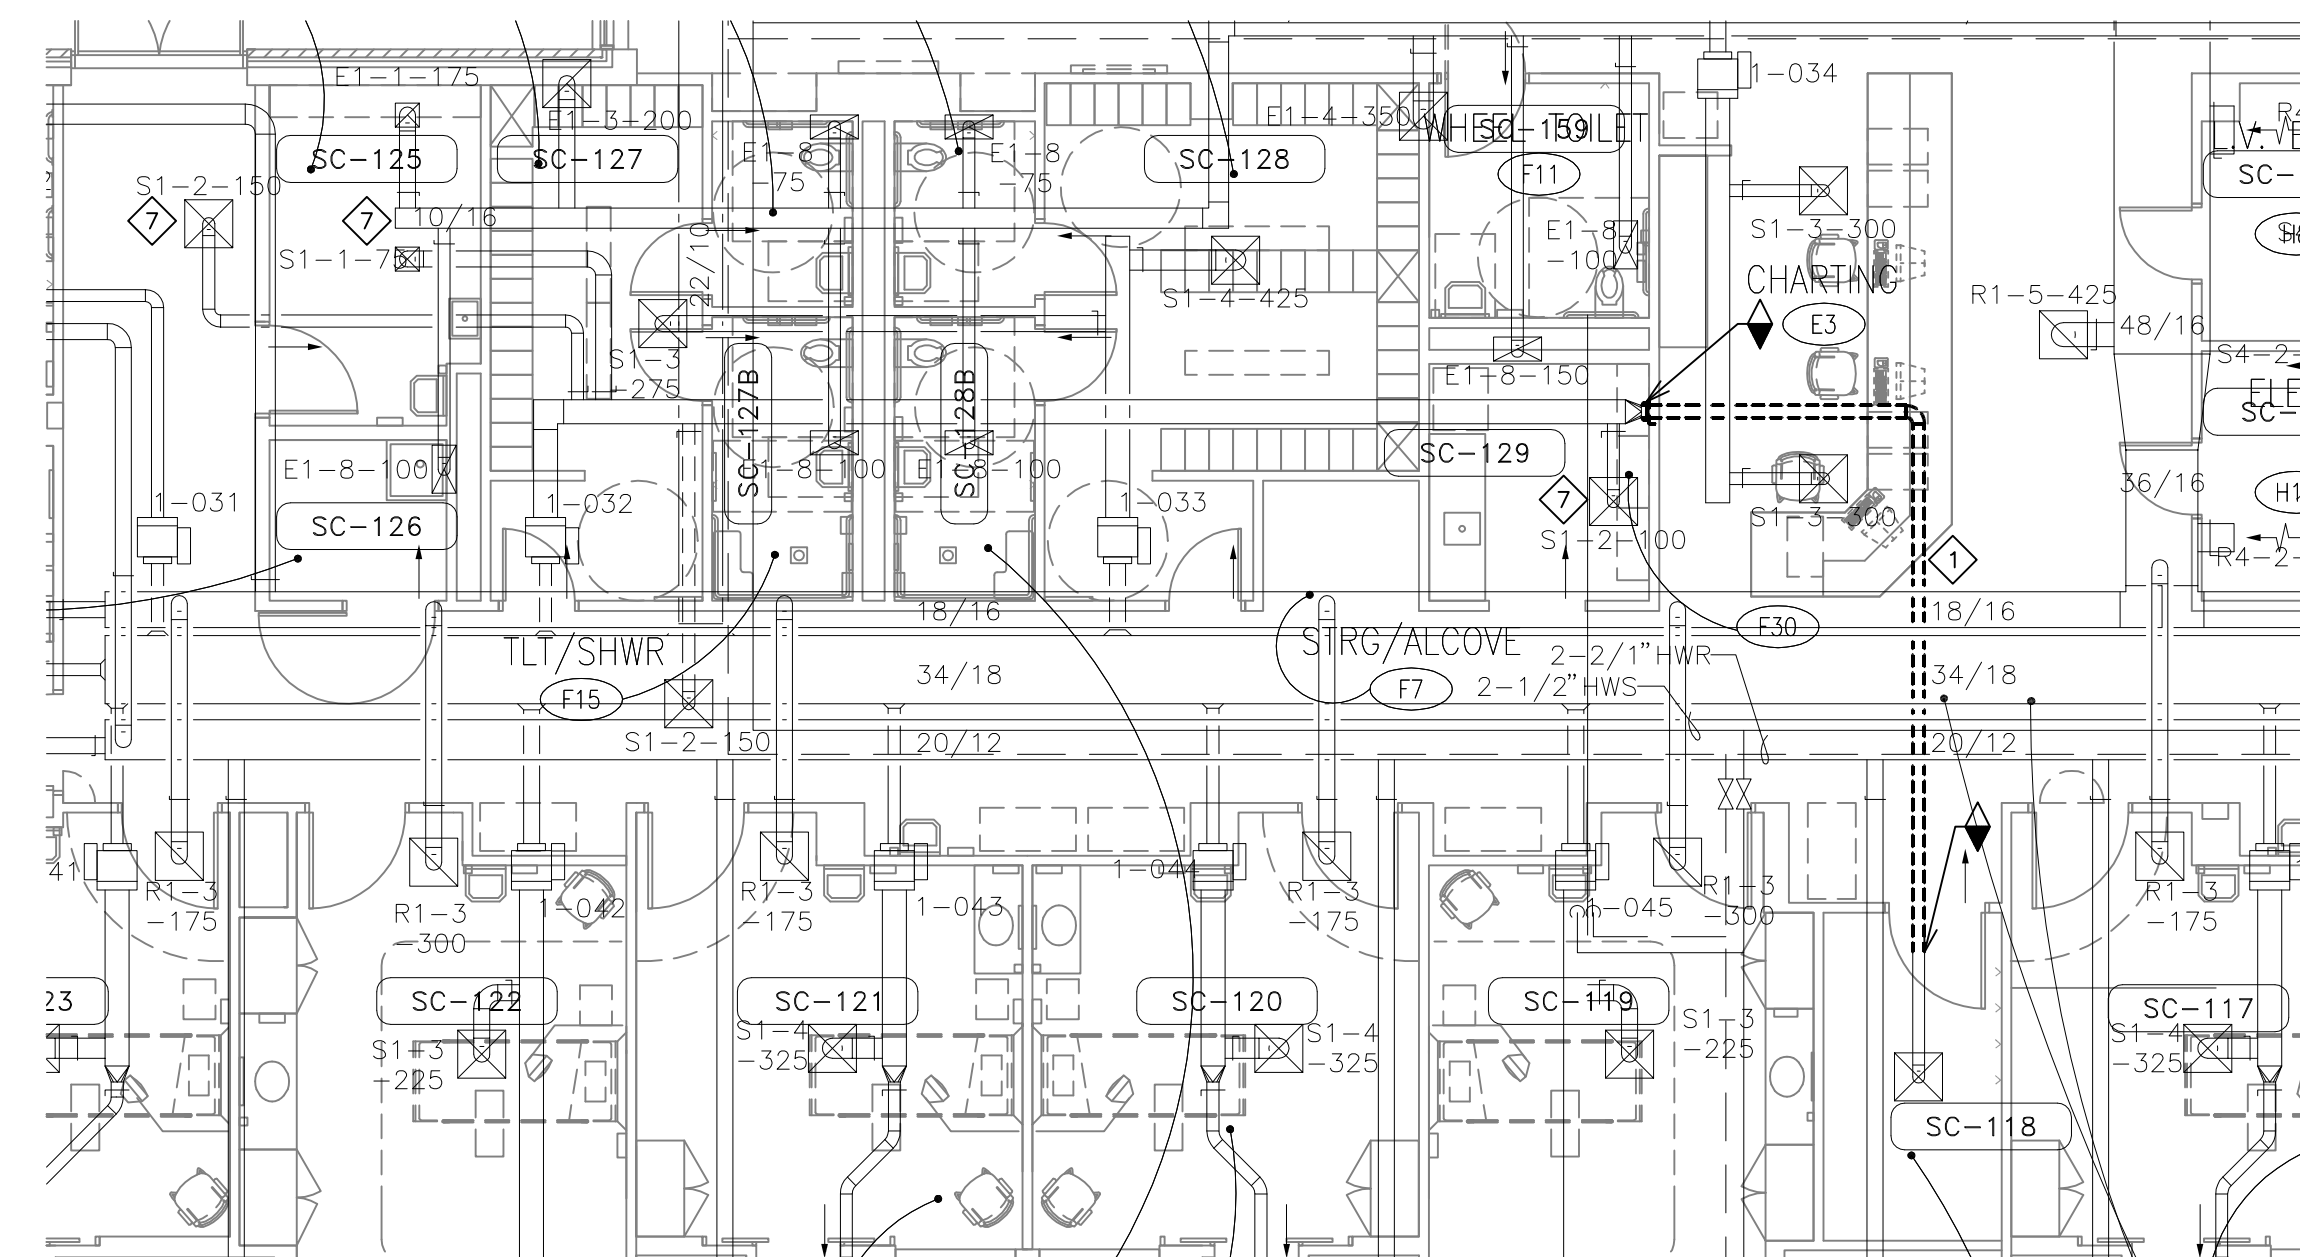


③ SC-118 DEMO PLAN
1/8"=1'-0"

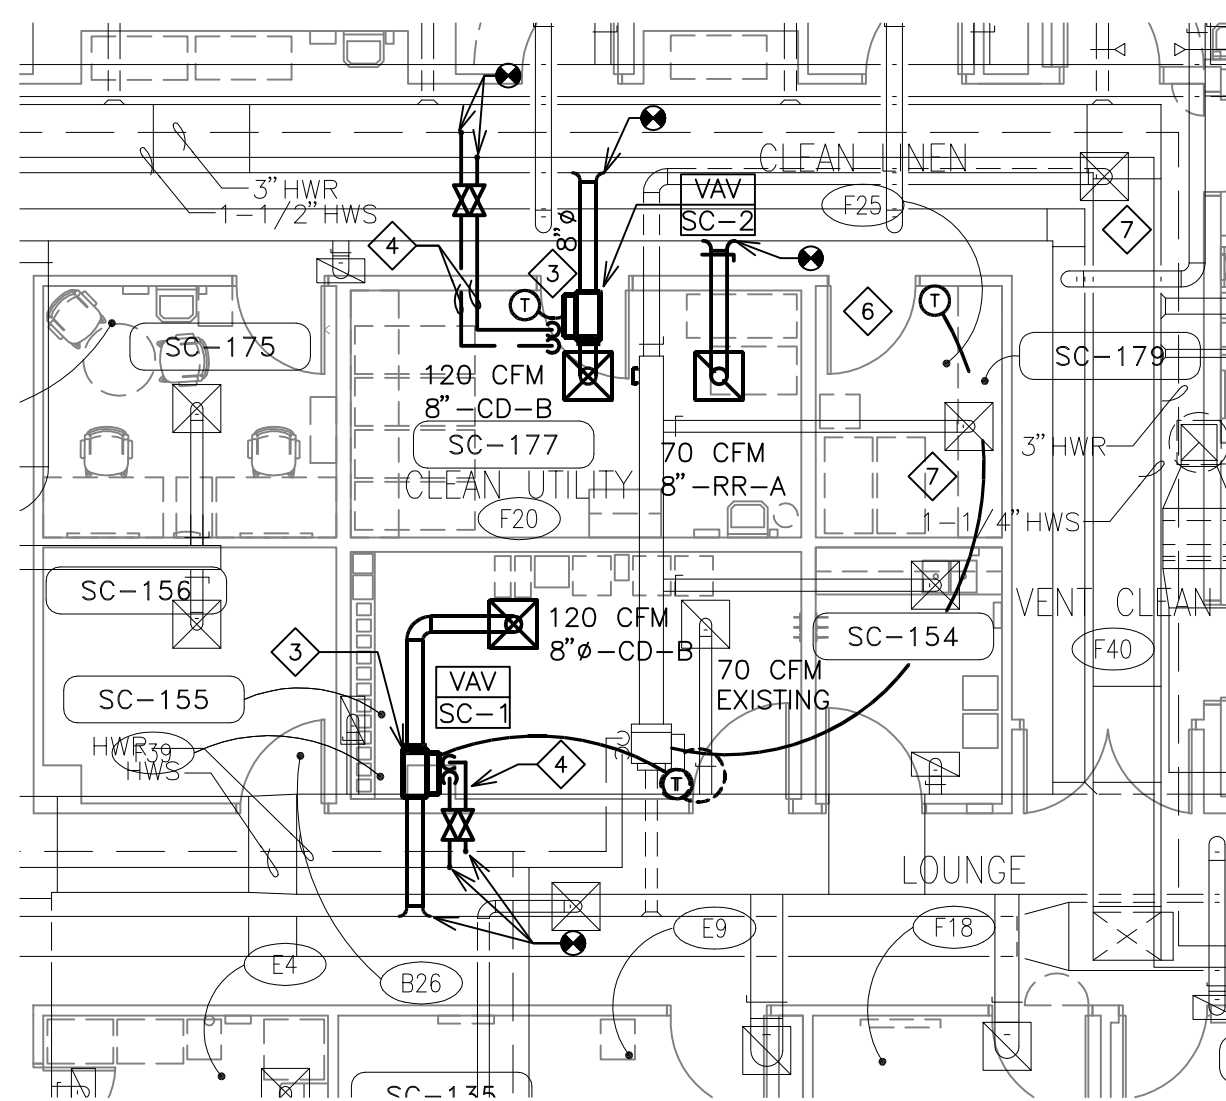

④ SC-155 AND SC-177 PLAN
1/8"=1'-0"

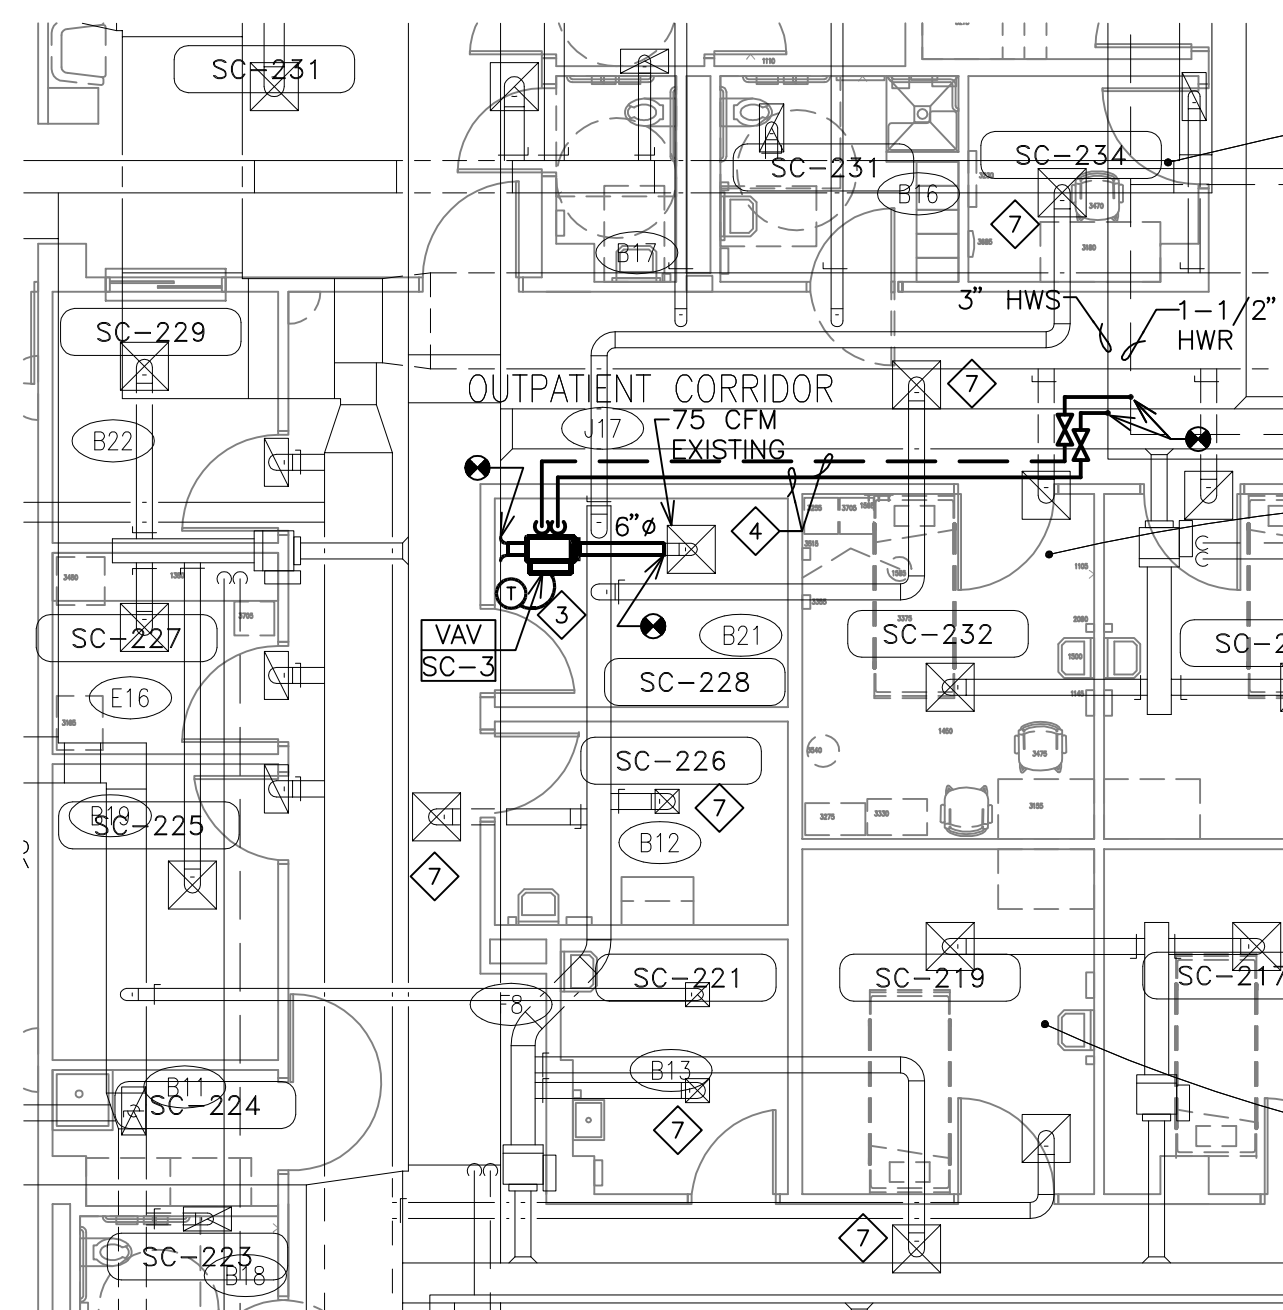

⑤ SC-228 PLAN
1/8"=1'-0"

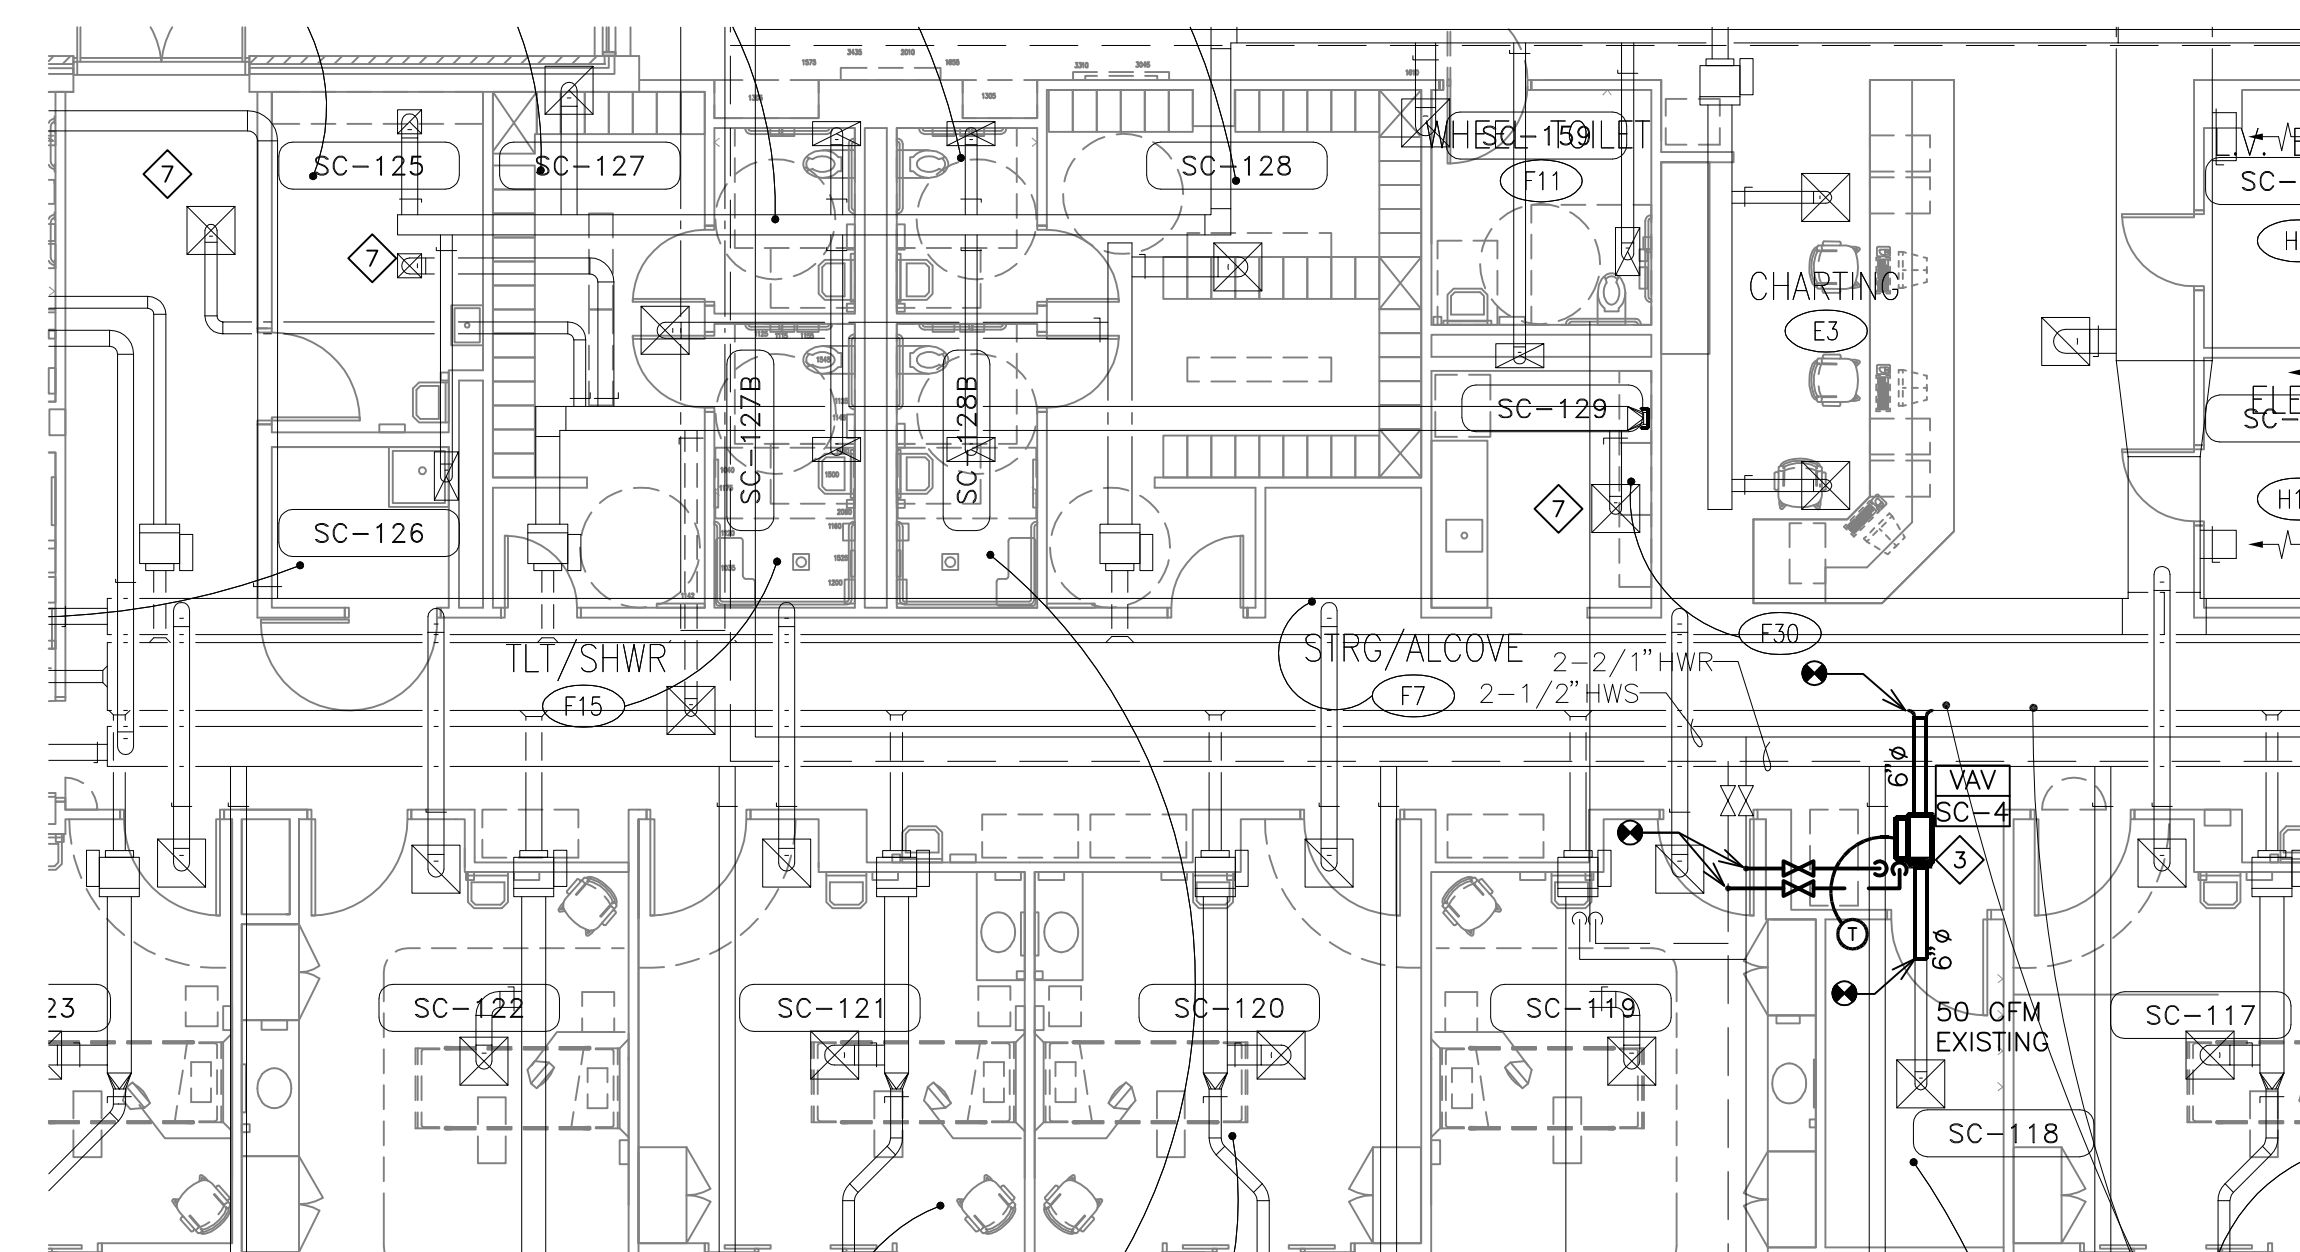

⑥ SC-118 PLAN
1/8"=1'-0"

GENERAL NOTES:

- CONTRACTOR TO COORDINATE LOCATION OF ALL NEW SUPPLY DIFFUSERS AND RETURN GRILLES WITH EXISTING DEVICES AND EQUIPMENT IN CEILING.
- CONTRACTOR IS RESPONSIBLE FOR ALL CEILING DEMOLITION AND REPAIR AS REQUIRED FOR WORK.
- CONTRACTOR SHALL COORDINATE ALL WORK, DEMOLITION, AND INSTALLATION WITH VA PERSONNEL.

KEY NOTES:


- DEMOLISH SECTION OF SUPPLY DUCT, CAP BRACH AT MAIN.
- DEMOLISH EXISTING DIFFUSER AND SUPPLY DUCT BACK TO MAIN AND CAP.
- INSTALL NEW VAV BOX WITH DDC CONTROLS AND HOT WATER RE-HEAT COIL.
- ROUTE NEW 3/4" HOT WATER SUPPLY AND RETURN TO NEW VAV BOX REHEAT COIL.
- RELOCATE EXISTING THERMOSTAT.
- INSTALL RELOCATED THERMOSTAT, COORDINATE WITH EXISTING WALL FINISHES.
- MEASURE CFM PRIOR TO CONSTRUCTION, RE-BALANCE DIFFUSER AND VAV BOX TO MEASURED NUMBERS AFTER COMPLETION OF CONSTRUCTION.

GENERAL NOTES:

GENERAL CONTRACTOR AND/OR ALL SUBCONTRACTORS SHALL FIELD VERIFY ALL DIMENSIONS SHOWN ON THESE PLANS AND SHALL BE RESPONSIBLE FOR VARIATIONS BETWEEN PLAN DIMENSIONS AND ACTUAL FIELD DIMENSIONS. WHERE VARIATIONS ARE FOUND TO OCCUR, THE CONTRACTOR SHALL NOTIFY THE PROJECT ENGINEER IN WRITING PRIOR TO PROCEEDING WITH CONSTRUCTION; NO ADJUSTMENT TO THE WORK WILL BE MADE WITHOUT THE PRIOR APPROVAL OF THE PROJECT ENGINEER.

GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR GENERAL DEMOLITION INCLUDING REMOVAL OF WALLS, PARTITIONS, DOORS & CEILING & FLOORS, ANY AND ALL CUTTING OF CONCRETE FLOORS, WALLS OR STRUCTURE SHALL BE THE GENERAL CONTRACTOR'S RESPONSIBILITY. CORE DRILLING THROUGH CONCRETE WALLS, FLOORS OR STRUCTURE FOR PIPING OR CONDUIT SHALL BE THE RESPONSIBILITY OF THE SUBCONTRACTOR BY TRADE. FIRESTOPPING OF THESE OPENINGS SHALL BE DONE BY THE RESPECTIVE SUBCONTRACTOR. REMOVAL OF DEBRIS RESULTING FROM DEMOLITION, CUTTING, AND/OR DRILLING IS THE RESPONSIBILITY OF THE GENERAL CONTRACTOR. PATCHING AND REPAIR OF CONCRETE WALLS, FLOOR, OR STRUCTURE SHALL BE THE RESPONSIBILITY OF THE GENERAL CONTRACTOR; THIS WILL BE ACCOMPLISHED UPON COMPLETION OF THE INSTALLATION OF ANY AND ALL UTILITIES INSTALLED BY THE VARIOUS SUBCONTRACTORS.

DUNHAM
Dunham Associates, Inc.
50 South Sixth Street / Suite 1100
Minneapolis, Minnesota 55402-1540
PHONE 612.465.7950 FAX 612.465.7951
WEB dunhameng.com
mechanical + electrical consulting engineering

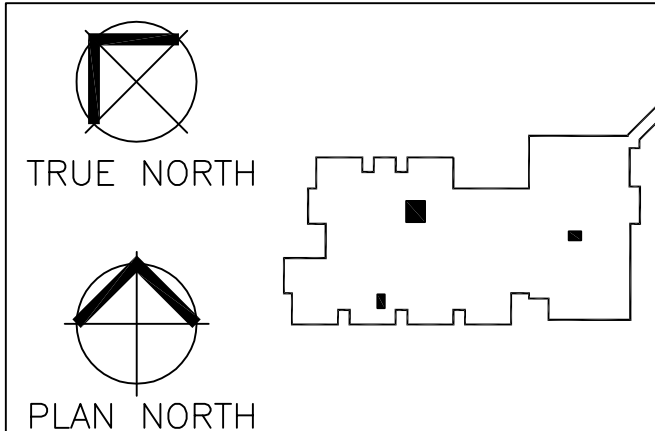

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed Engineer under the laws of the State of Minnesota.
DARIN MAY
Date 08/13/2012 Reg. No. 42401
Drawing Scale
AS NOTED
Plot Scale
12" = 1'-0"

Drawing Title
SCI BUILDING SPD SATELLITE ROOMS PLANS
Approved: Cynthia Doolittle, Chief, Projects Section
Approved: Steven Challeen, Director, Engineering

Project Title
VA SPD HVAC IMPROVEMENTS
Location **V.A. MEDICAL CENTER ONE VETERANS DRIVE MINNEAPOLIS, MN 55417**
Date **08/13/2012**
Checked CM
Drawn AU

Project No.
618-12-127
Building Number
76
DRAWING NO.
1260-M17
Dwg. 22 of 28

100% CD ISSUE
FULLY SPRINKLERED
Office of
Facilities
Management
Department of
Veterans Affairs